

■车规叠层片式铁氧体超大电流磁珠 Automotive Grade Multilayer Chip Ferrite High Current Beads



◆特征

Feature

- * 体积小
Miniature volume.
- * 漏磁小，不产生耦合，可靠性高
No cross coupling between inductors due to low magnetic shield and high reliability.
- * 无引线，不产生跟踪性，适合高密度表面贴装
No lead, ideal for high density SMT installation, with no directionality.
- * 优良的可焊性及耐热冲击性，适合回流焊
Superior solderability and resistance to soldering heat, suitable for reflow soldering.
- * 通过 AEC-Q200 符合性测试
Pass AEC-Q200 compliance test.


◆应用

Application

- * 汽车多媒体和无线连接系统、车身与舒适系统
Automotive multimedia, wireless connection system and body comfort system.


◆型号表示法

Part Number



① 产品代号 Product Code		② 规格尺寸(L×W×T) Dimensions (mm)		③ 材料代号 Material Code	④ 阻抗(Ω) Impedance		⑤ 包装方式 Packaging Style	
ABW	车规叠层铁氧体大电流磁珠	100505	1.0×0.5×0.5	U	示例 Example		T	卷带盘装
	Automotive Grade	160808	1.6×0.8×0.8		110	11		Tape & Reel
	Multilayer Chip Ferrite High	201209	2.0×1.2×0.9		121	120	B	散装 Bulk
	Current Beads	321609	3.2×1.6×0.9		102	1000		


◆产品结构 Product Structure



- a. 银层 Ag layer
- b. 镀层 Ni/Sn plating
- c. 内电极 Inner electrode
- d. 瓷体 Body

◆规格尺寸
Dimension

Part No	L(mm)	W(mm)	T(mm)	D(mm)
100505 (0402)	1.0± 0.15 (0.040± 0.006)	0.5± 0.15 (0.020± 0.006)	0.5± 0.15 (0.020± 0.006)	0.25± 0.1 (0.010± 0.004)
160808 (0603)	1.6± 0.20 (0.063± 0.008)	0.8± 0.20 (0.031± 0.008)	0.8± 0.20 (0.031± 0.008)	0.3± 0.2 (0.01± 0.008)
201209 (0805)	2.0± 0.20 (0.079± 0.008)	1.2± 0.20 (0.047± 0.008)	0.9± 0.20 (0.035± 0.008)	0.5± 0.3 (0.020± 0.012)
321609 (1206)	3.2± 0.20 (0.126± 0.008)	1.6± 0.20 (0.063± 0.008)	0.9± 0.20 (0.035± 0.008)	0.5± 0.3 (0.020± 0.012)


◆电性能参数
Electrical Characteristics
1005 Type

型号 Part NO	误差范围 Tolerance	标称阻抗 Impedance(Ω)	测试频率 Test frequency(MHz)	直流电阻 DCR (Ω)Max	额定电流 Ir (A)Max
ABW100505U070T	0~11 Ω	7	100	0.04	0.8
ABW100505U190T	12~25 Ω	19	100	0.06	0.7
ABW100505U260T	±25%	26	100	0.06	0.7
ABW100505U310T	±25%	31	100	0.08	0.7
ABW100505U600T	±25%	60	100	0.15	0.6
ABW100505U101T	±25%	100	100	0.2	0.45
ABW100505U121T	±25%	120	100	0.25	0.45
ABW100505U151T	±25%	150	100	0.25	0.45
ABW100505U201T	±25%	180	100	0.4	0.3
ABW100505U301T	±25%	300	100	0.5	0.3
ABW100505U501T	±25%	500	100	0.65	0.2
ABW100505U601T	±25%	600	100	0.7	0.2
ABW100505U801T	±25%	800	100	0.9	0.2
ABW100505U102T	±25%	1000	100	1	0.2

1608 Type

型号 Part NO	误差范围 Tolerance	标称阻抗 Impedance(Ω)	测试频率 Test frequency(MHz)	直流电阻 DCR (Ω)Max	额定电流 Ir (A)Max
ABW160808U110T	7~15 Ω	11	100	0.08	1
ABW160808U190T	12~25 Ω	19	100	0.08	1
ABW160808U260T	±25%	26	100	0.08	1
ABW160808U310T	±25%	31	100	0.08	1
ABW160808U800T	±25%	80	100	0.15	1
ABW160808U101T	±25%	100	100	0.15	1
ABW160808U121T	±25%	120	100	0.15	1

型号 Part NO	误差范围 Tolerance	标称阻抗 Impedance(Ω)	测试频率 Test frequency(MHz)	直流电阻 DCR (Ω)Max	额定电流 I _r (A)Max
ABW160808U151T	±25%	150	100	0.2	1
ABW160808U181T	±25%	180	100	0.2	1
ABW160808U221T	±25%	220	100	0.2	1
ABW160808U301T	±25%	300	100	0.25	1
ABW160808U501T	±25%	500	100	0.3	1
ABW160808U601T	±25%	600	100	0.3	1
ABW160808U801T	±25%	800	100	0.55	0.5
ABW160808U102T	±25%	1000	100	0.55	0.5

2012 Type

型号 Part NO	误差范围 Tolerance	标称阻抗 Impedance(Ω)	测试频率 Test frequency(MHz)	直流电阻 DCR (Ω)Max	额定电流 I _r (A)Max
ABW201209U050T	0~15 Ω	5	100	0.03	3
ABW201209U110T	7~15 Ω	11	100	0.03	3
ABW201209U260T	±25%	30	100	0.05	3
ABW201209U310T	±25%	31	100	0.05	3
ABW201209U500T	±25%	36	100	0.06	3
ABW201209U600T	±25%	60	100	0.06	3
ABW201209U800T	±25%	80	100	0.08	2.5
ABW201209U121T	±25%	120	100	0.1	2
ABW201209U151T	±25%	150	100	0.1	2
ABW201209U181T	±25%	180	100	0.15	2
ABW201209U221T	±25%	220	100	0.15	2
ABW201209U301T	±25%	300	100	0.2	2
ABW201209U501T	±25%	500	100	0.25	1.5
ABW201209U601T	±25%	600	100	0.25	1.5
ABW201209U801T	±25%	800	100	0.3	0.8
ABW201209U102T	±25%	1000	100	0.3	0.8
ABW201209U122T	±25%	1200	100	0.45	0.5
ABW201209U152T	±25%	1500	100	0.5	0.3

3216 Type


型号 Part NO	误差范围 Tolerance	标称阻抗 Impedance(Ω)	测试频率 Test frequency(MHz)	直流电阻 DCR (Ω)Max	额定电流 I _r (A)Max
ABW321609U050T	0~15 Ω	5	100	0.04	4
ABW321609U090T	5~13 Ω	9	100	0.05	4
ABW321609U110T	7~15 Ω	11	100	0.05	4
ABW321609U190T	12~25 Ω	19	100	0.05	3
ABW321609U260T	±25%	26	100	0.05	3
ABW321609U310T	±25%	31	100	0.07	3
ABW321609U600T	±25%	60	100	0.07	3

型号 Part NO	误差范围 Tolerance	标称阻抗 Impedance(Ω)	测试频率 Test frequency(MHz)	直流电阻 DCR (Ω)Max	额定电流 Ir (A)Max
ABW321609U800T	$\pm 25\%$	80	100	0.07	3
ABW321609U101T	$\pm 25\%$	100	100	0.07	3
ABW321609U121T	$\pm 25\%$	120	100	0.07	3
ABW321609U151T	$\pm 25\%$	150	100	0.12	2.5
ABW321609U181T	$\pm 25\%$	180	100	0.12	2.5
ABW321609U221T	$\pm 25\%$	220	100	0.12	2.5
ABW321609U301T	$\pm 25\%$	300	100	0.15	2
ABW321609U391T	$\pm 25\%$	500	100	0.17	2
ABW321609U501T	$\pm 25\%$	500	100	0.2	2
ABW321609U601T	$\pm 25\%$	600	100	0.2	2
ABW321609U801T	$\pm 25\%$	800	100	0.25	2
ABW321609U102T	$\pm 25\%$	1000	100	0.25	2
ABW321609U122T	$\pm 25\%$	1200	100	0.35	1
ABW321609U152T	$\pm 25\%$	1500	100	0.45	0.5

◆可靠性测试方法
Reliability Test Method

序号 No.	项目 Items	要求 Requirements	试验方法及备注 Test Methods and Remarks
1	高温存储 High Temperature Exposure (Storage)	无可见损伤; 阻抗: $\Delta Z/Z \leq \pm 30\%$ 。 No Visible damage; Impedance: $\Delta Z/Z \leq \pm 30\%$	温度 125℃; 不通电; 持续时间 1000h; 周期测试 250h,500h; 试验结束后 (24 \pm 4)h 内进行电性能测量。 Temperature 125℃; Unpowered; Duration 1000h; Examination at 250h ,500h and 1000h; Measurement at (24 \pm 4) hours after test conclusion.
2	温度循环 Temperature Cycling	无可见损伤; 阻抗: $\Delta Z/Z \leq \pm 30\%$ 。 No Visible damage; Impedance: $\Delta Z/Z \leq \pm 30\%$	高温 125℃; 低温-40℃; 高、低温下暴露时间各 30 分钟; 转换时间 ≤ 1 min; 循环次数 1000 次。 试验结束后 24 \pm 4 小时内进行测试。 High Temperature +125℃;low temperature -40℃; Duration at each temperature 30 min; Transition time ≤ 1 min. Severity 1000 cycles; Measurement at 24 \pm 4 hours after test conclusion.
3	偏高湿度(高温高湿) Biased Humidity	无可见损伤; 阻抗: $\Delta Z/Z \leq \pm 30\%$ 。 No Visible damage; Impedance: $\Delta Z/Z \leq \pm 30\%$	温度 85℃; 湿度 85RH%; 持续时间 1000 小时, 不通电。周期测量 250 小时、500 小时。 试验结束后 24 \pm 4 小时内进行测试。 Temperature 85℃;Relative humidity 85%; Duration 1000 h; Unpowered. Examination at 250h ,500h and 1000h; Measurement at 24 \pm 4 hours after test conclusion.


序号 No.	项目 Items	要求 Requirements	试验方法及备注 Test Methods and Remarks
4	工作寿命 Operational Life	无可见损伤; 阻抗: $\Delta Z/Z \leq \pm 30\%$ 。 No Visible damage; Impedance: $\Delta Z/Z \leq \pm 30\%$	温度 125℃; 施加电流: 常温额定电流的 1/2; 持续时间: 1000 小时。 试验结束后 24±4 小时内进行测试。 Temperature 125℃; Test current: half of Rated current at normal temperature; Duration 1000 h; Measurement at 24±4 hours after test conclusion.
5	机械冲击 Mechanical Shock	无可见损伤; 阻抗: $\Delta Z/Z \leq \pm 30\%$ 。 No Visible damage; Impedance: $\Delta Z/Z \leq \pm 30\%$	正半弦波; 峰值加速度 100g; 脉冲持续时间 6ms; 三轴六向各 3 次, 共 18 次。 Half sine wave. Peak value 100g. Normal duration 6 ms; Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks)
6	振动 Vibration	无可见损伤; 阻抗: $\Delta Z/Z \leq \pm 30\%$ 。 No Visible damage; Impedance: $\Delta Z/Z$ within $\pm 30\%$	频率 10Hz~2000Hz; 加速度 5 克; 一个循环 20 分钟; X、Y、Z 三个方向每个方向 12 个循环, 共 36 个循环; . The entire frequency range of 10 to 2000 Hz and return to 10 Hz shall be traversed in 20 minutes. This cycle shall be preformed 12 time in each of three mutually perpendicular directions (total of 36 times), so that the motion shall be applied for a total period of approximately 12 hours. Peak value 5g.
7	耐焊接热 Resistance to Soldering Heat	无可见损伤; 阻抗: $\Delta Z/Z \leq \pm 30\%$ 。 No Visible damage; Impedance: $\Delta Z/Z \leq \pm 30\%$	焊槽法; 温度 (260±5) °C; 浸渍时间 (10±1) s。 Solder bath; Temperature (260±5) °C; Immersion timer (10±1) seconds.
8	可焊性 Solder ability	无可见损伤; 电极面 95%以上覆盖新的焊料。 95% or more of electrode area shall be coated by new solder.	焊槽法; 无铅焊锡; 温度 (245±5) °C; 浸渍时间 (3±0.3) s。 Solder bath; Lead-free solder; Temperature (245±5) °C; Immersion timer (3±0.3) seconds.
9	弯曲 Board flex	无可见损伤; 阻抗: $\Delta Z/Z \leq \pm 30\%$ 。 No Visible damage; Impedance: $\Delta Z/Z \leq \pm 30\%$	电感器安装在厚 1.6mm 环氧玻璃布板上, 以 1mm/s 的速度向下弯曲 2mm; 维持时间 60s±5s。 The testing samples shall be mounted on a 100mm×40mm FR4 PCB board, which is 1.6mm±0.2mm thick. Bending shall be applied to the 2.0mm with 1.0mm/sec; Duration: 60±5s.

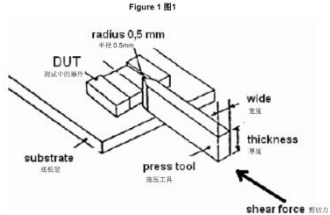序号 No.	项目 Items	要求 Requirements	试验方法及备注 Test Methods and Remarks
10	端子强度 Terminal Strength (SMD)	无可见损伤; 阻抗: $\Delta Z/Z \leq \pm 30\%$ 。 No Visible damage; Impedance: $\Delta Z/Z \leq \pm 30\%$	<p>试样安装在环氧玻璃布板上, 施加 1005 规格: 5N, ≥ 1608 规格: 17.7N 的力到试样的侧面, 保持 $60s \pm 1s$。</p> <p>The testing samples shall be mounted on the testing epoxy boards, exerting force on side of the samples, Size 1005: 5N; \geq Size 1608: 17.7N, Duration $60s \pm 1s$。</p> 


◆ 产品特性曲线图

Product Characteristic Curve


ABW1005 Type

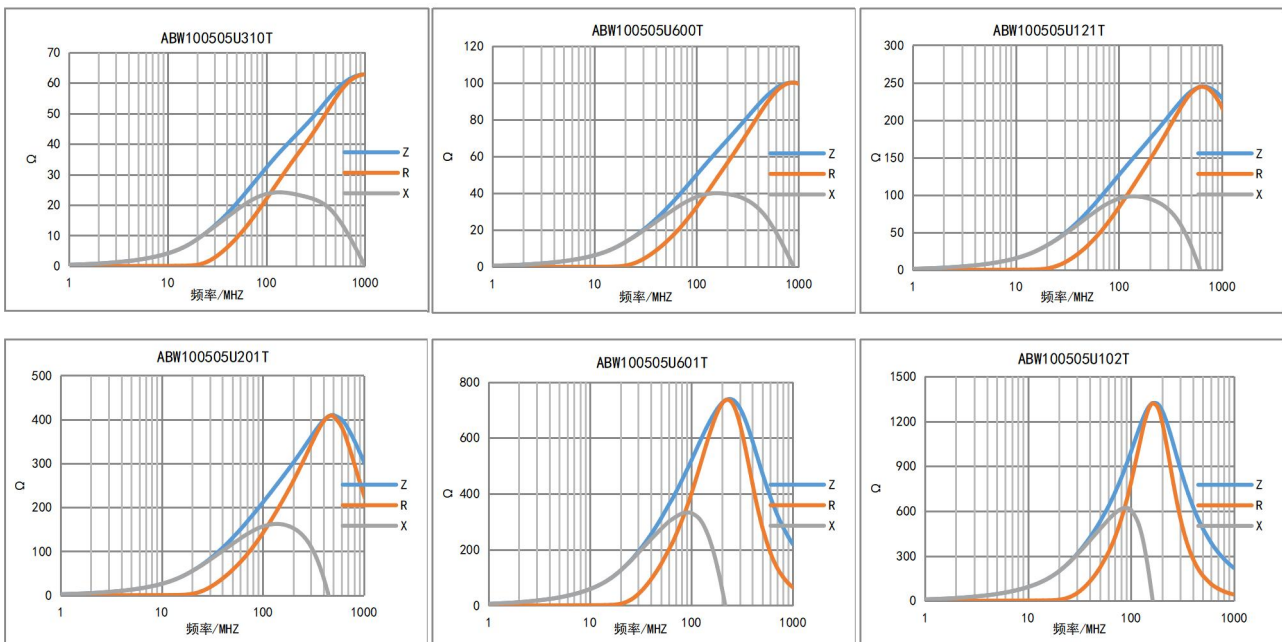


ABW1608 Type

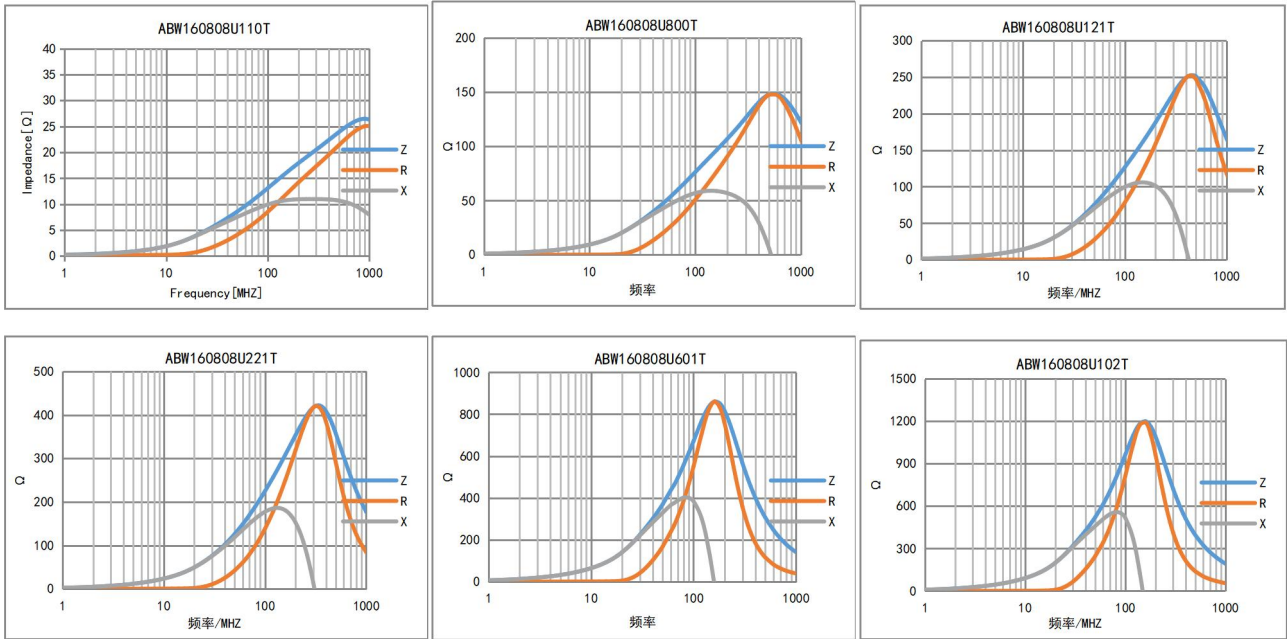

ABW2012 Type

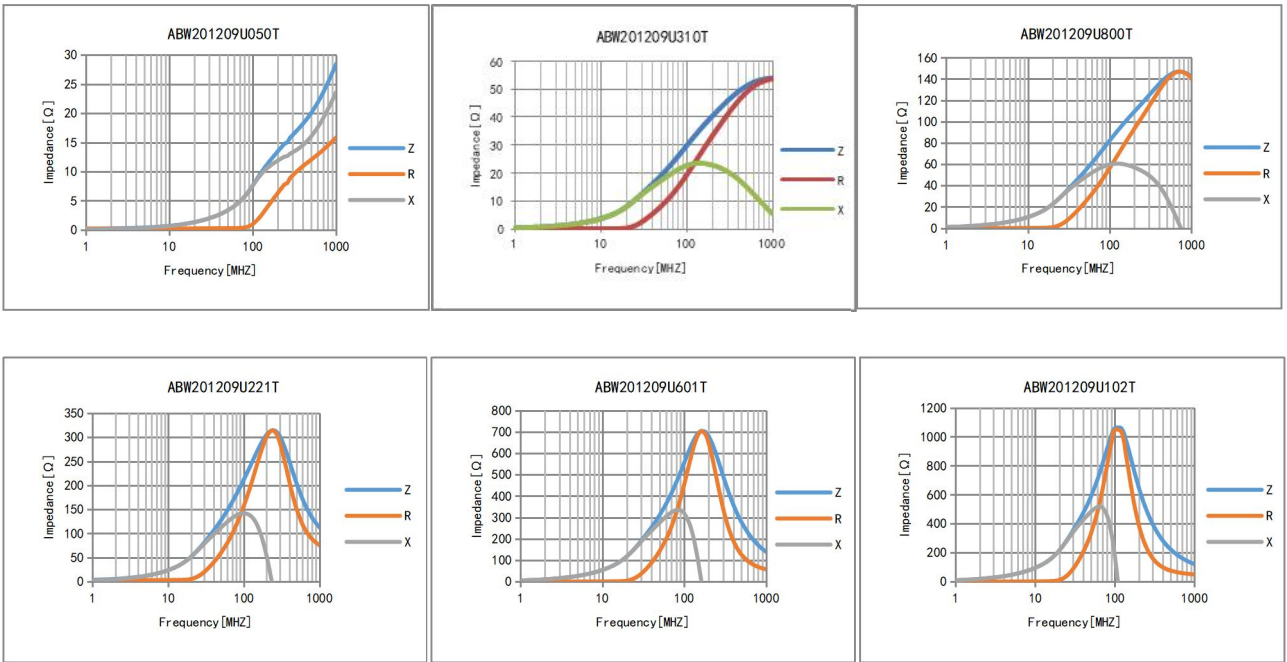


ABW3216 Type

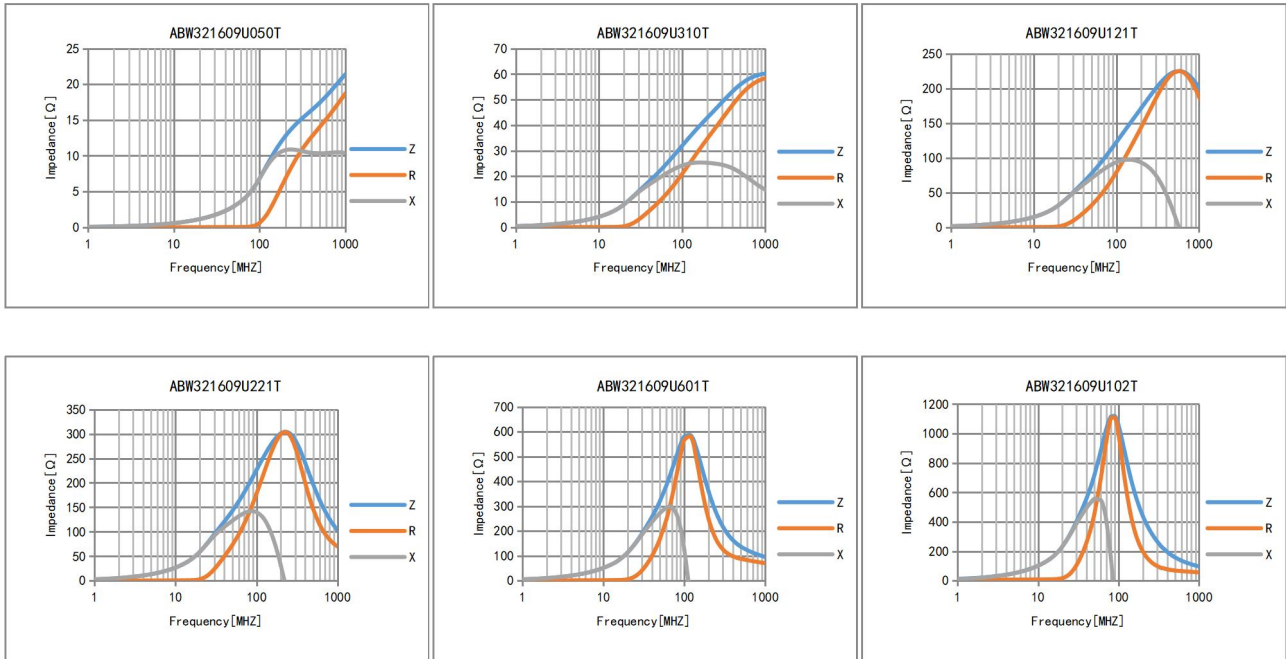


◆ 包装

Packaging

* 编带图 Taping drawings

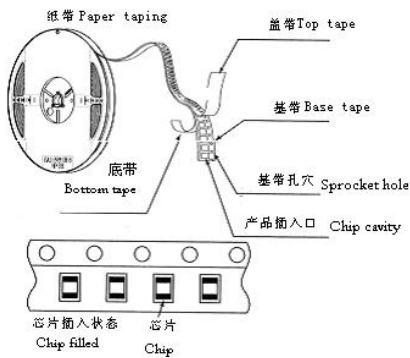


* 卷盘尺寸 Reel dimensions (Unit: mm)

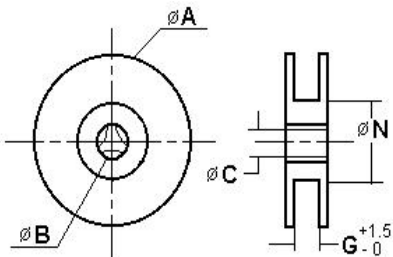


型号 Size	A	B	C	N	G
CF-8	178±2.0	22.0±2.0	12.5±1.5	57±2.0	8

* 导带及空格部分 Leader and blank portion

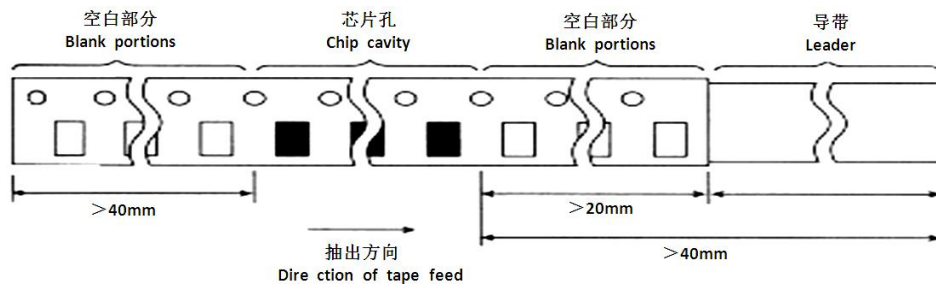

* 编带尺寸 Taping dimensions (Unit: mm)

纸带 Paper tape

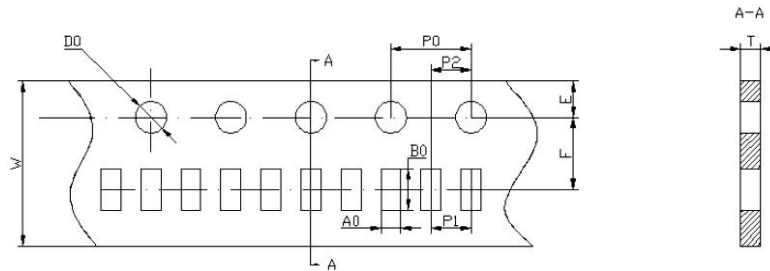

Part NO.	A0	B0	W	F	E	P1	P2	P0	D0	T
100505	0.65±0.1	1.15±0.1	8.0±0.2	3.5±0.1	1.75±0.2	2.0±0.1	2.0±0.1	4.0±0.2	1.55±0.1	0.60±0.1
160808	1.10±0.2	1.90±0.2	8.0±0.2	3.5±0.1	1.75±0.2	4.0±0.2	2.0±0.1	4.0±0.2	1.55±0.1	0.95±0.1
201209	1.50±0.2	2.30±0.2	8.0±0.2	3.5±0.1	1.75±0.2	4.0±0.2	2.0±0.1	4.0±0.2	1.55±0.1	0.95±0.1
321609	1.90±0.2	3.50±0.2	8.0±0.2	3.5±0.1	1.75±0.2	4.0±0.2	2.0±0.1	4.0±0.2	1.55±0.1	0.95±0.1

* 包装数量 (单位: 粒) Packaging number (Unit: Pcs)

类型 SIZE	321609	201209	160808	100505
每卷数量 REEL	4000	4000	4000	10000
每盒数量 BOX	40000	40000	40000	100000
每箱数量 CASE	240000	240000	240000	600000